

COMPACT TENSIONED is a motorized screen with a peculiar tensioning system on each side of it, that guarantees the perfect flatness of the fabric.

This product has been specifically studied for the niche of Home Theatre market.

For this reason, it is the right solution for the most particular and demanding requests.

It is available in 4:3 and 16:9 ratios and it is equipped with black side edges, a black extra drop and Matte White fabric in order to give the best projection performance.




- Silent motor system provides a smooth and quiet operation
- Totally manufactured in aluminium
- Smart design and easy to install
- Housing dimensions: 94x112 mm.
- Housing painted with white epoxy powders (RAL 9010)
- Two universal mounting brackets either for ceiling or for wall included
- Switcher on/off included
- Projection fabrics are flame-retardant - classification M1 and M2
- Side black borders of 5 cm. (in the narrowest point), black drop of 30 cm. on the top and black counterweight - 35 mm. high
- Tensioning system on both sides
- **AVAILABLE ACCESSORIES:** RF remote control with integrated or external receiver, False ceiling Trim Kit, Interface switch 12 Volt, Wall extension brackets

TECHNICAL SPECIFICATIONS


4:3 Ratio Viewing area (WxH)-(A)	16:9 Ratio Viewing area (WxH)-(A)	16:10 Ratio Viewing area (WxH)-(A)	Overall dimensions		Front projection surfaces		Approx. net weight
cm. 160x120 cm. 180x135 cm. 200x150 cm. 250x190	cm. 160x90 cm. 180x101 cm. 200x112 cm. 250x140	cm. 160x100 cm. 180x112 cm. 200x125 cm. 250x156	B cm. 198 B cm. 218 B cm. 238 B cm. 288	C cm. 193 C cm. 213 C cm. 233 C cm. 283	Matte White Microperforated Lumi-Grey Cinesound	gain 1.2 gain 1.1 gain 0.8 gain 0.7	Kg. 17 Kg. 18 Kg. 19 Kg. 23

* Warranty: 5 years on the motor - 24 months on the other components


TECHNICAL SPECIFICATIONS

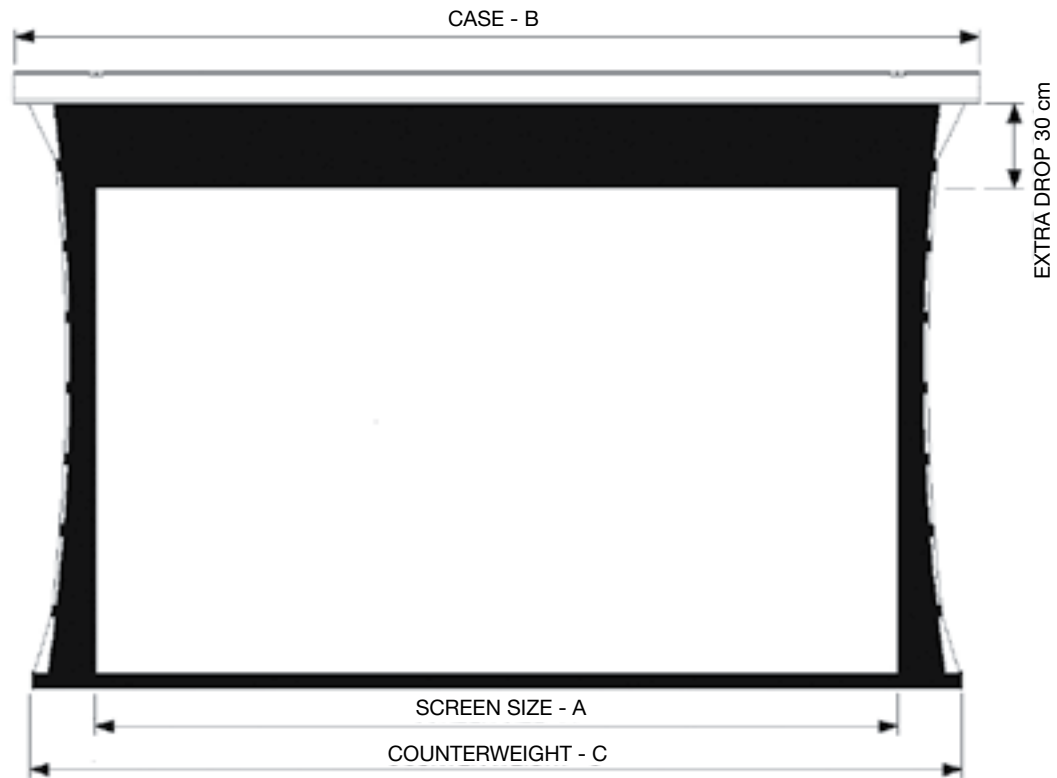


Concealing counterweight

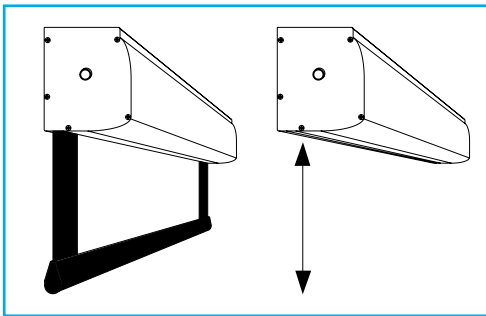


Cabinet dimensions

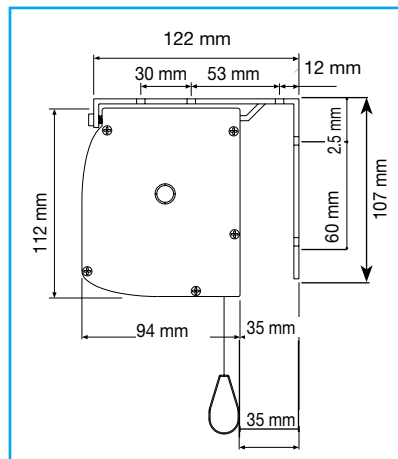


Cloth drops on the front side of the housing (optional)

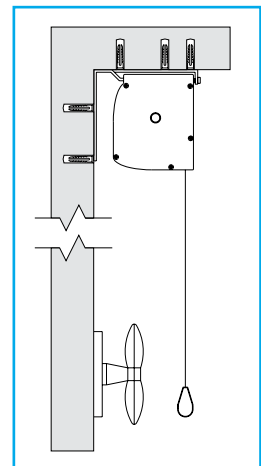

Wall Mounting



Ceiling Mounting



Motor characteristics

Power: 6 Nm
Speed: 17 rpm
Power supply: 230V / 50 Hz
Consumption: 137 W
Certification: IMQ

Euroscreen S.r.l.
 Via Stiria, 45/16 - 33100 Udine - Italy
 Tel. +39 0432 522755
 Fax +39 0432 524000
www.screenint.com
info@screenint.com

